


PURPOSE

Contactless dimensions, surface profile, deformation, vibration measurement, sorting, sensing presence or absence, positional checking, bulk materials and liquids level measurement.

OPERATION

Sensor operation is based on the principle of optical triangulation.

Radiation of a semiconductor laser is focused by an objective on an object. The radiation scattered at the object is collected on the CMOS array by the input lens. Object motion causes a corresponding motion of the image. Built-in signal processor calculates the distance to the object according to the light spot image position on the CMOS array.

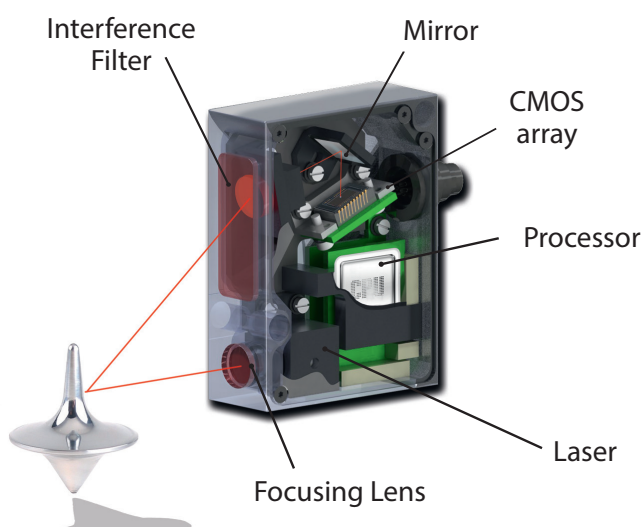


MAIN FEATURES

- Measuring ranges from 2 to 2500 mm
- $\pm 1 \mu\text{m}$ accuracy
- Sampling rate up to 70 kHz
- RS232/RS485/Ethernet/CAN/ CANopen +4...20 mA/0...10V/ModbusRTU
- Binocular sensors for laser scanning
- Binary and ASCII data formats
- Sensors with BLUE lasers to control high temperature, mirrored and semitransparent objects
- Sensors with IR lasers
- Mutual synchronization of the sensors (master-slave) for multi-axis measurement tasks
- Service Software for parameter setting and results visualization
- Free SDK and examples for Windows, Linux, .NET, MATLAB, LabVIEW

MODELS

- ZLDS100 — universal sensors
- ZLDS100HS — high speed sensors
- ZLDS101/ZLDS101HS — sensors with increased base distance and large measurement range. High speed sensors
- ZLDS102 — compact sensors
- ZLDS103 — super compact sensors
- ZLDS100Rd — high-precision high-speed sensors
- ZLDS104/ZLDS104Rt /ZLDS104Wi-Fi — laser probes for inner surface control

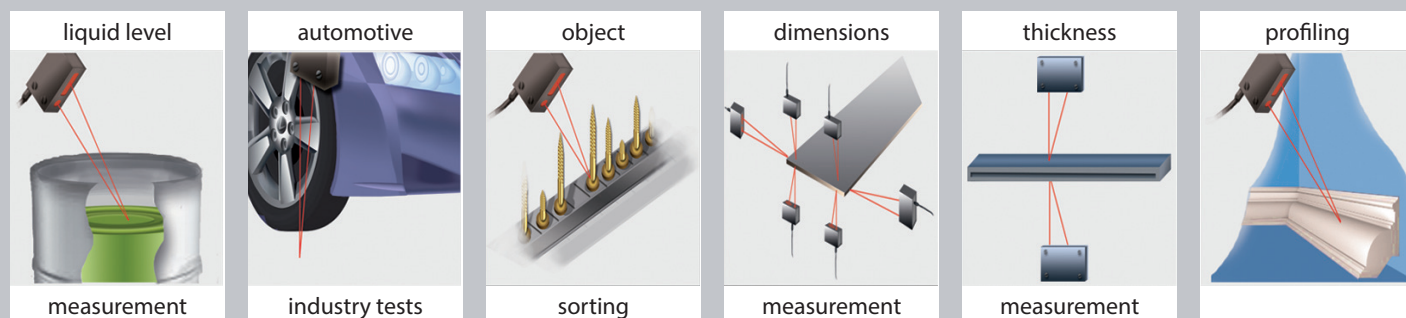


PARAMETER		VALUE
Output interface	digital	RS232 (max. 460.8 kbit/s) or RS485 (max. 921.6 kbit/s) or RS232 and CAN V2.0B (max 1Mbit/s) or Ethernet and (RS32 or RS485)
	analog	4...20 mA ($\leq 500 \Omega$ load) or 0...10 V
Synchronization input		2.4 – 5 V (CMOS, TTL)
Logic output		programmed functions, NPN: 100 mA max; 40 V max for output
Power supply, V		9 ...36
Power consumption, W		1.5..2
Environment resistance	Enclosure rating	IP67 (for the sensors with cable connector only)
	Vibration	20g/10...1000Hz, 6 hours, for each of XYZ axes
	Shock	30 g / 6 ms
	Operation temperature, °C	-10...+60, (-30...+60 for the sensors with built-in heater), (-30...+120 for the sensors with built-in heater and air cooling housing)
	Permissible ambient light, lx	>30000
	Relative humidity	5-95% (no condensation)
Storage temperature, °C		-20...+70
Housing material		aluminum

- Varied diode powers
- Binocular sensors
- Available with Red, Blue or IR laser diodes
- Accuracy $\pm 0.05\%$ working range




OPTIONS

- Protective housing with air and water cooling
- Custom versions with non-standard base, range or housing shape
- Special version for use in high vibration conditions
- Special flexible cable for robotic applications
- Variants with round and elliptical spot

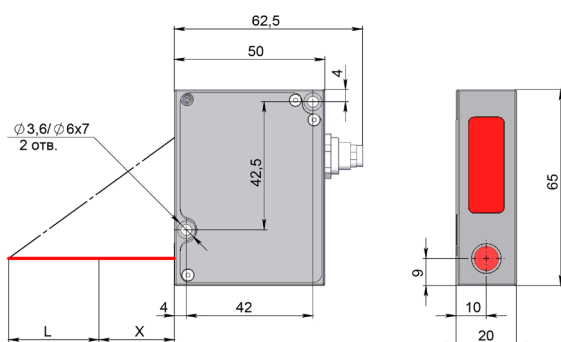


SOFTWARE

- Setting sensor parameters
- Receiving, storage, visualization
- Speed and acceleration calculation

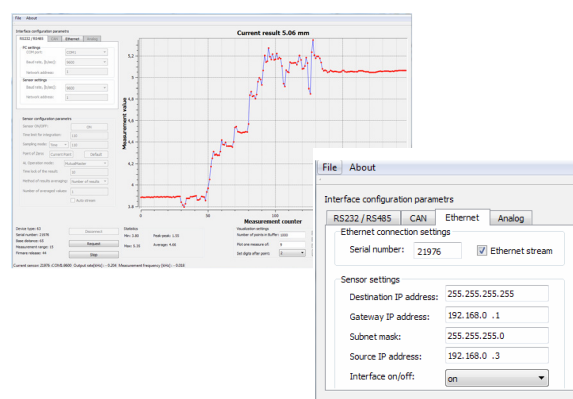

ZLDS100		R-4	2	5	10	15	25	30	50	100	250	500	750	1000	1250
Base distance X, mm		39	15	15	15, 25 60	15, 30 65	25, 45 80	35, 55 95	45, 65 105	60, 90 140	80	125	145	245	260
Measurement range, mm		4	2	5	10	15	25	30	50	100	250	500	750	1000	1250
Linearity, %		±0.05 of the range												±0.1	
Resolution, %		0.01 of the range (for the digital output only)												0.02	
Temperature drift		0.02% of the range/°C													
Max. measurement frequency, Hz		9400													
Light source		red semiconductor laser, 660 nm wavelength or UV semiconductor laser 405/450 nm wavelength (BLUE version)													
Light source	model	ZLDS100													
	output power	≤0.2	≤3 mW												
	laser safety Class	1	3R (IEC60825-1)												
	model		ZLDS100L												
	output power		≤0.95 mW												
	laser safety Class		2 (IEC60825-1)												
	model											ZLDS100P			
	output power											≤20 mW			
laser safety Class												3B (IEC60825-1)			
Weight (without cable)		100													
Note 1: ZLDS100-R-4-39 sensor is designed to use with mirror surfaces and glass.															

Note 1: ZLDS100-R-4-39 sensor is designed to use with mirror surfaces and glass.

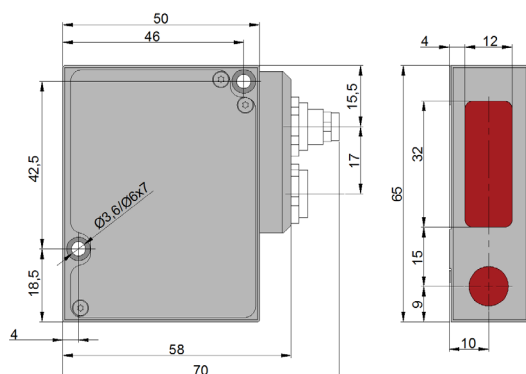


- Universal high-speed compact laser sensors
- Sampling rate up to 70 kHz
- Available with Red and Blue laser diodes
- Ideal for registration of high speed events and vibration measurement

ZLDS100HS	2	5	10	15	25	30	50	100	250	500	750
Base distance X, mm	15	15	15, 25 60	15, 30 65	25, 45 80	35, 55 95	45, 65 105	60, 90 140	80	125	145
Measurement range, mm	2	5	10	15	25	30	50	100	250	500	750
Max. measurement frequency, kHz	70										
Linearity, %	±0.1 (70 kHz) of the range										
Resolution, %	0.01 (70 kHz) of the range										
Temperature drift	0.02% of the range/°C										
Light source	red semiconductor laser (660 nm wavelength) or blue semiconductor laser (405/450 nm wavelength)										
Output power	≤4.8 mW						≤20 mW		≤80 mW		
Laser safety Class	3R (IEC/EN 60825-1:2014)						3B (IEC/EN 60825-1:2014)				
Weight (without cable)	110										

LARGE-BASE AND LONG RANGE SENSORS

ZLDS101 Series


- High-precision measurement of the position of remote objects
- High-speed (70 kHz) sensors

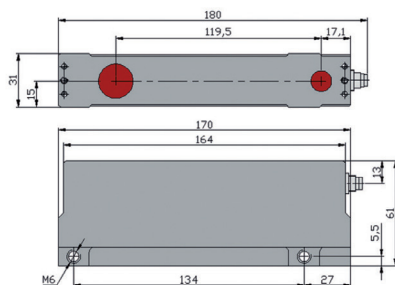

ZLDS101	10	30	40	100	250	500	600	1000	1000	1500	2000	2500	20	50
Base distance X, mm	230	300	330	500	230	300, 1000	230	1300	380	390	410	420	540	535
Measurement range, mm	10	30	40	100	250	500	600	1000	1000	1500	2000	2500	20	50
Max. measurement frequency	9.4 kHz, 70 kHz													
Linearity, % of the range	±0.05										±0.1		±0.05	
Resolution, % of the range	0.01 of the range (digital output only)										0.03		0.01	
Temperature drift	0.02% of the range/°C													
Light source	red semiconductor laser, 660 nm wavelength or UV semiconductor laser 405/450 nm wavelength (BLUE version)													
Output power	≤4.8 mW							80 mW						
Laser safety Class	3R (IEC60825-1)										3B (IEC60825-1)			
Weight (without cable)	500											2000		

COMPACT LASER SENSORS

ZLDS102 Series





ZLDS102	50	100	250	500
Base distance X, mm	25	45	65	105
Measurement range, mm	50	100	250	500
Max. measurement frequency	2000 Hz			
Linearity, % of the range	± 0.05			
Resolution, % of the range	0.01 (digital output only)			
Temperature drift	0.02% of the range/°C			
Light source	red semiconductor laser, 660 nm wavelength			
Output power	≤ 0.95 mW			
Laser safety Class	2 (IEC60825-1)			
Weight (without cable)	60			

SUPER COMPACT LASER SENSORS

ZLDS103 Series

- Unique combination of dimensions, performance and operating ranges

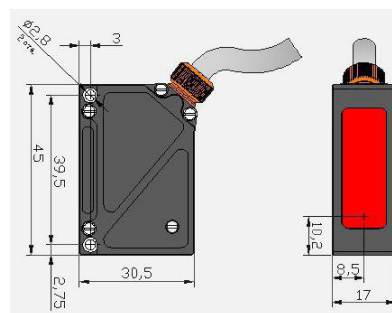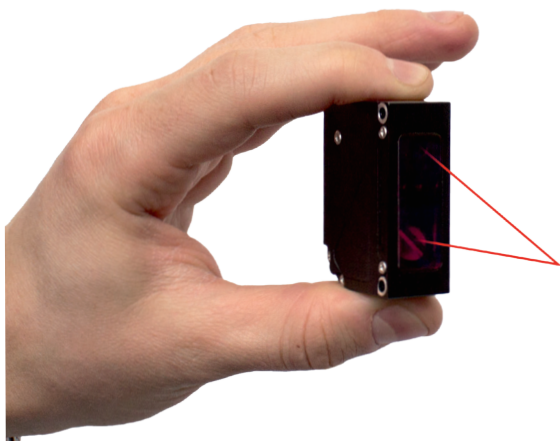




ZLDS103	10	25	50	100	250	500
Base distance X, mm	20	20	30	50	65	105
Measurement range, mm	10	25	50	100	250	500
Max. measurement frequency	9400 Hz					
Linearity, % of the range	±0.05					
Resolution, % of the range	0.01 (digital output only)					
Temperature drift	0.02% of the range/°C					
Light source	red semiconductor laser, 660 nm wavelength or UV semiconductor laser 405/450 nm wavelength (BLUE version)					
Output power, mW	≤0.95 mW					
Laser safety Class	2 (IEC60825-1)					
Weight (without cable), gram	40					

SPECIALIZED LASER SENSORS FOR PAVEMENT PROFILE AND TEXTURE MEASUREMENT

ZLDS100Rd Series

- Accuracy ± 0.03% of working range
- Sampling rate up to 70 kHz

MODEL	SPECIFIC FEATURES	ASSIGNMENT	
ZLDS100Rd-500-125 ZLDS100Rd-1000-245	<ul style="list-style-type: none"> high resistance to solar radiation stable operation on wet surfaces 	Pavement profile measurement	
ZLDS100Rd-500-195	<ul style="list-style-type: none"> 70 kHz operating frequency round laser spot, diameter <1 mm 		
ZLDS100Rd-230-210 ZLDS100Rd-250-230	<ul style="list-style-type: none"> 70 kHz operating frequency round laser spot, diameter <0.8 mm accuracy ±0.03% of the range 	Pavement roughness (texture) measurement	
ZLDS100Rd-Txt-30-30	<ul style="list-style-type: none"> reduced triangulation angle round laser spot, diameter <60 µm simultaneously obtaining profile and image of the surface 		

